

UT330TH DATA LOGGER

- Temperature Range: -30°C ~ 70°C
- Accuracy: +/- 0.4°C
- Resolution: -0.1°C
- Humidity: 0%RH ~ 100%RH
- IP67
- °C / °F Selection
- Data Storage 64 000
- Data Recall
- USB Interface
- Auto Record Time Setup
- User Name Settings
- Alarm Threshold
- Start Mode Setup
- Alarm Mode Setup
- LED Alarm
- Low Battery Indication



excl VAT **R1 295.00**
Incl VAT **R1 489.25**

UT387C WALL SCANNER

- Detect Principle: Electro-Magnetic Induction
- Detects Wooden Beams, Metal Objects, Electrical Wire
- Metals Scan Depth: 76mm
- Stud-scan Depth (Wood): 38mm
- Thick-scan Depth (Wood): 38mm
- AC Electrical Wire Depth: 51mm
- Calibration Alarm
- Buzzer/LED Indication
- APO
- Low Battery Indication



excl VAT **R1 399.00**
Incl VAT **R1 608.85**

excl VAT **R1 599.00**
Incl VAT **R1 838.85**

UT203+ 400A TRMS CLAMP METER

- AC/DC Current: 40/400A
- AC/DC Voltage: 600V
- Resistance: 40MΩ
- Capacitance: 10mF
- Frequency: 10MHz
- Duty Cycle
- NCV
- Diode Test
- Continuity Buzzer
- Data Hold
- Low Battery Indication
- Backlight
- APO
- Auto Range
- Jaw Capacity 28mm
- Relative Mode
- MAX/MIN
- Display Size: 35 x 27mm
- 4000 Display Count



UT303C+ INFRARED THERMOMETER

- Temperature: -32°C ~ 1300°C
- Accuracy: +/- 1.5°C
- Repeatability: 0.7°C
- D:S Ratio: 30:1
- Response Time: 250ms
- Selection °C/°F
- Emissivity: 0.1 ~ 1.0 Adjustable
- Data Hold
- Spectral Response: 8µm~14µm
- Laser Power: < 1mW
- Data Storage 99
- Low Battery Indication
- Circular Laser
- MAX/MIN/AVG/DIFF
- LCD Backlight
- Lock Measurement
- High/Low LED & Audible alarm
- Schedule Measurement
- LCD Display Colour EBTN



excl VAT **R3 999.00**
Incl VAT **R4 598.85**

UT125C POCKET SIZE MULTIMETER


- AC/DC Voltage: 600V
- AC/DC Current: 400mA
- Resistance: 40MΩ
- Frequency: 60kHz
- Capacitance: 100µF
- Diode
- Continuity Buzzer
- NCV
- Low Battery Indication
- Data Hold
- APO
- Duty Cycle Measurement
- 4000 Display Count



excl VAT **R665.00**
Incl VAT **R764.75**

UTD2052CL+ 50MHz STORAGE OSCILLOSCOPE

- Channels: 2 (Dual)
- Sample Rate: 500MS/s
- Memory Depth: 64kpts
- Power: 100 ~ 240VAC, 50Hz/60Hz
- Time-Based Range: 5ns/div ~ 50s/div
- Trigger Modes: Edge, Pulse, Alternate
- Display 7 Inch TFT LCD, WVGA (400x240)
- Bandwidth: 50MHz
- Rise Time: ≤7s
- Waveform Capture Rate: 5000wfms/s
- Vertical Scale: 1mV/div ~ 20V/div
- Storage: Setup, Wave, Bitmap
- Interface USB-OTG

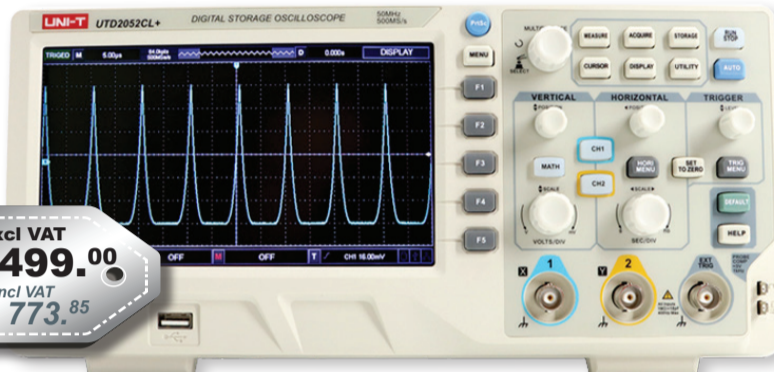

excl VAT **R8 499.00**
Incl VAT **R9 773.85**

UT219DS PROFESSIONAL PRO TRMS CLAMP METER

- AC/DC Current: 600A
- AC/DC Voltage: 1000 V
- LoZ ACV: 600V
- Capacitance: 60mF
- Temperature: 1000°C
- Motor 3 Phase Test 80VAC ~ 600VAC
- Motor Phase Sequence Measurement With 2 Probes
- AC+DC Dual-mode Display (V+I)
- LCD Backlight
- Duty Cycle
- Inrush Current
- Low Pass Filter
- Flashlight
- Jaw Size: 33mm
- Sampling Rate: 5 times/sec
- V + A Dual Display
- 6000 Display Count
- Resistance: 60MΩ
- Frequency: 40MHz
- Diode
- APO
- Data hold
- Zero Hold
- Relative Mode
- Auto/Manual Ranging
- Low Battery Indication
- Auto Backlight



excl VAT **R4 299.00**
Incl VAT **R4 943.85**

M11W HANDHELD THERMOGRAPHY CAMERA

- Thermal resolution: 192 x 144 (24 648 pixels)
- SuperIR 384 x 288
- NETD : < 40mK
- Temperature measurement range : -20 °C - 550 °C
- Accuracy: Max (±2°C ±2%),
- Measurement Presets: Center spot, Hot spot, Cold spot,
- User Preset Point/Line/Area
- FOV: 37.5° x 27.8°
- Pixel Pitch: 7.5 ~ 14µm
- Colour Palettes: White Hot, Black Hot, Rainbow, Ironbow, Red hot, Fusion, Rain, Blue Red
- Focus Free
- Image Mode: Thermal / Optical / Fusion / PIP
- 25 Hz image frequency
- 3.5" LCD touch screen display
- Bluetooth
- USB Interface
- www.hikmicrotech.com/en/download/5



excl VAT **R21 559.00**
Incl VAT **R24 792.85**

UT33D+ PALM SIZE MULTIMETER

- AC/DC Voltage: 600 V
- DC Current: 10A
- Resistance: 20MΩ
- NCV
- Diode
- Continuity Buzzer
- LCD Backlight
- Relative Mode
- LCD Size 53mm x 28mm
- Probe Placing Slots
- 2000 Display Count



excl VAT **R339.00**
Incl VAT **R389.85**

A12T TEMPERATURE HUMIDITY METER

- Temperature: -10 ~ 50°C
- Sampling Time: 10s
- Display of Temperature, Humidity and Time
- Dual Temperature Measurement
- Humidity: 20% ~ 95% RH
- External Temperature: -10°C ~ 50°C
- MAX/MIN
- Comfort Rating: Cold/Dry/Comfort
- Alarm Clock/Time Display
- 12/24 Hour Mode



excl VAT **R375.00**
Incl VAT **R431.25**

UT301D+ INFRARED THERMOMETER

- Dual Laser
- D:S Ratio: 12:1
- Temperature: -32°C ~ 600°C
- Accuracy: +/- 1.5°C
- Emissivity: 0.1 ~ 1.0 Adjustable
- High/Low Temperature Alarm
- Audible Alarm
- LED Alarm
- MAX/MIN Measurement
- Data Storage 99
- Scheduled Measurement
- Date/Time
- High Contrast Colour EBTN Display



excl VAT **R1 599.00**
Incl VAT **R1 838.85**

UT261B PHASE SEQUENCE & MOTOR ROTATION INDICATOR

- AC Voltage: 90V ~ 600V
- Frequency: 15Hz ~ 400Hz
- Working Current: < 3mA
- Phase Sequence Indication: LED
- Missing Phase Indication: LED
- Motor Rotation Indication: LED



excl VAT **R1 455.00**
Incl VAT **R1 673.25**

UT673A BATTERY TESTER

- 12V Battery Test: 7 ~ 16V DC
- 12V/24V Cranking System Test: 7 ~ 30V DC
- 12V/24V Charging system test: 7 ~ 30V DC
- Battery Type: Ordinary Lead Acid Battery, AGM Flat Plate Battery, AGM Spiral Battery, GEL Battery, EFB Battery
- Battery Capacity: 3 ~ 250Ah
- Over Voltage Protection
- Reverse Connection Protection
- A Prompt For Poor Contact
- Battery Status, Life, Capacity Display
- Battery Internal Resistance Display
- Four-Terminal Kelvin Test
- Test without Battery Disassembly
- LED Colour Indication for Test Results



excl VAT **R1 155.00**
Incl VAT **R1 328.25**

UT890D+ TRMS MULTIMETER

- DC Voltage: 1000 V
- AC Voltage: 750V
- AC/DC Current: 20A
- ACV Frequency: 10Hz ~ 10kHz
- Resistance: 60MΩ
- Frequency: 9.999MHz
- Capacitance: 100mF
- NCV
- MAX/MIN
- Diode
- Continuity Buzzer
- APO
- hFE Transistor
- High Voltage Phase Detection
- Data Hold
- LCD Backlight
- Low Battery Indication
- Fuse Blowing Alarm
- Acoust-Optic Indication
- Relative Mode
- Current (AC/DC) Mode Memory
- Over Current Alarm
- 6000 Display Count



excl VAT **R629.00**
Incl VAT **R723.35**



excl VAT **R5 999.00**
Incl VAT **R6 898.85**




excl VAT **R1 295.00**
Incl VAT **R1 489.25**

UT533 TRMS INSULATION RESISTANCE MULTIMETER

- 1000V AC/DC
- Frequency 1MHz
- Resistance 40MΩ
- Short Circuit Current: < 2mA
- Diode Test
- APO
- Insulation Resistance (50/100/250/500/1000V)
- Continuity Buzzer
- Data Hold
- 6000 Display Count
- Capacitance 100µF
- Temperature -40 ~ 537°C
- Auto Range
- Data Logging 99
- Low Battery Indication
- LCD Backlight

UTG932E WAVEFORM GENERATOR

- Max Frequency: 30MHz
- Sampling rate : 200MSa/s
- Waveform: Sine, Square, Ramp, Pulse, Noise, DC, Arbitrary
- Working Modes: Output gating, Continuous, Modulation, Frequency sweep
- Modulation Types: AM, FM, PM, FSK, Line, Log
- Portable Handheld Mini Signal Generator
- High-accuracy, Broad-band 6 Bit Frequency Counter, Range: 100mHz ~ 100MHz
- Easy to Use Modulation Type
- 24 Non-Volatile Waveform stores
- 4.3 Inches High Resolution Colour TFT Display
- Channels: 2

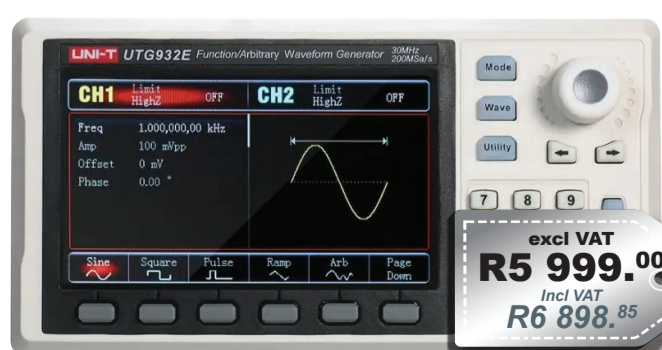

excl VAT **R5 999.00**
Incl VAT **R6 898.85**



excl VAT **R2 999.00**
Incl VAT **R3 448.85**

UTP3315TFL-II POWER SUPPLY

- Output Voltage: 0-30V
- Output Current: 0-5A
- Output Power: 150W
- Ripple Noise: ≤ 0.8mVrms
- Reliability: MTBF(e): ≥2000hrs
- Display Mode: LED Voltage and Current Dual Display

UT661D SERIES PIPELINE BLOCKAGE DETECTOR

- Transmitter
- Receiver
- Max Detection Distance: 50cm
- Transmitter Current: 230 ~ 310mA
- Receiver Current: 150 ~ 450mA
- Test Output Sound: 75 / 93dB
- Plastic and Metal pipes
- Buzzer Prompt
- Flash Prompt
- Low Battery Indication
- 35m Signal Wire



excl VAT **R2 533.00**
Incl VAT **R2 912.95**